



GREENBEAM LED

DC570LUS

PRODUCT INFORMATION



42W-56W
CAN REPLACE UP TO:
400W HID

Housing:	Die Cast Aluminum
Finish:	Weather Resistant Dark Bronze Powder Coat*
Lens:	Heat and Impact Resistant Tempered Glass
Mounting Options:	No mounting bracket included. Optional Trunion, Swivel or Straight Arm available.
Mounting Height:	Up to 50 feet
LEDs:	Mid-power Samsung LEDs or high-power Philips Lumileds.
Operating Voltage:	100-277 VAC 60/60Hz
Power Factor:	>0.98
Max Ambient Temp:	Pending Final Testing
Rated Life:	50,000 HRS
DLC Qualified:	Pending
Environment:	Indoor/Outdoor; Wet Location
Certifications/Approvals	ETL LISTED US AND CANADA, IP 66 RATED CONFORMS TO: UL-8750, UL-1598, CSA22.2
Warranty:	3 year standard. 5 year available.

*May be available in other finishes. Contact for details.

DC570LUS

The **DC570LUS** is a corrosion resistant Flood Light designed to provide the long life and high reliability required in industrial and commercial applications. These lights are ideal for providing safety and security along building perimeters.

FEATURES & BENEFITS

- Uses up to **88% less energy** than HID equivalent
- **3-5x longer life** than fluorescent or HID systems
- Mercury and UV free with **RoHS certified LEDs**
- Designed and **Assembled in the USA**
- Instant On/Off

DC570LUS ORDERING GUIDE*

MODEL	WATTS	COLOR TEMPERATURE	OPTIONAL ACCESSORIES
DC570LUS 16.5" x 16.5" Area Light	42W	30K 3000K- Warm White	OS Occupancy Sensor
	56W	40K 4000K- Neutral White	DIM Dimmable Driver
		50K 5000K- Cool White	PC Photocell
		55K 5500K- Daylight	OP1 Optic 1- Narrow Beam
			OP2 Optic 2- Medium Beam

* Standard configuration in bold. Specifications may be subject to change without notice.



DESIGNED AND ASSEMBLED IN THE USA

SEPARATE MULTIPLE ACCESSORIES WITH A PERIOD IN THE ORDER LISTED ABOVE

EXAMPLE:

DC570LUS.56W.40K.OS = Occupancy Sensor

DC570LUS.56W.40K.OS.DIM = Occupancy Sensor, Dimmer


DC570LUS CONFIGURED SPECIFICATIONS*

PRODUCT NUMBER**	INPUT WATTS	COLOR TEMPERATURE	INITIAL LUMENS	EFFICACY (lm/W)	CRI
DC570LUS.42W.30K	42W	3000K	4800lm	114	>80
DC570LUS.42W.40K	42W	4000K	4800lm	114	>80
DC570LUS.42W.50K	42W	5000K	4800lm	114	>80
DC570LUS.42W.55K	42W	5500K	4800lm	114	>60
DC570LUS.56W.30K	56W	3000K	6400lm	114	>80
DC570LUS.56W.40K	56W	4000K	6400lm	114	>80
DC570LUS.56W.50K	56W	5000K	6400lm	114	>80
DC570LUS.56W.55K	56W	5500K	6400lm	114	>60

* Specs reflect nominal values. ** Standard configuration in bold. Specifications may be subject to change without notice.

DIMENSIONS

NOTE: DRAWINGS MAY NOT TO BE SCALE.

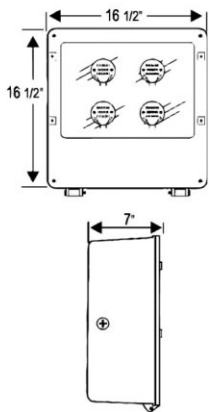

ACCESSORIES AND EXTRAS

Pictures are representative, accessories and options may change based on spec or availability.

IMAGE NOT AVAILABLE

Occupancy Sensor

ADD: .OS

Add motion-detected automatic on/off switching.



Dimmable Driver

ADD: .DIM

Add dimming capabilities to your fixture with a 0-10V dimming driver.



Photocell

ADD: .PC

Add automatic on/off switching based on ambient light. Internal button-type is standard.



Optics-1/Optics-2

ADD: .OP1 or .OP2

Available in narrow beam (.OP1) or medium beam.



Trunion Bracket

Two-piece bracket for mounting to flat surfaces.



Heavy Duty Swivel

For mounting to a 2 1/2" pole.



6" Straight Arm

For mounting to square poles.