

VT-LED 2,4,8 FT



Vapor Tight CCT & WATT Selectable Fixture



STANDARD




FEATURES

- Field selectable color temperatures include 3000k, 4000k and 5000k.
- Field Wattage Selectable Options for the 4 Ft -20W/30W/40W
8Ft -40W/60W/80W
- LED chromaticity based on < 5-step ANSI quadrangles.
- LED color maintenance < 0.002 chromaticity shift ($\Delta u'v'$) over the initial 6,000 hours of operation.
- Provides 6,000, 14,000, or 20,000 nominal lumens using 42, 100, or 150 nominal watts.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- 0-10vdc dimming drivers are standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Polycarbonate housing and frosted lenses are standard.
- Can Add Emergency Battery Backup, and Sensor

WARRANTY & LISTINGS

- cETLus listed for wet locations in ambient temperatures from -20°C to 50°C (-4°F to 122°F).
- IP67 rated for ingress protection.
- IK10 rated for impact.
- ETL sanitation listed for non-splash food zone to comply with NSF/ANSI 2 standard.
- NEMA 4X.
- Complies with FCC Part 15, class A.
- Complies with IEC/EN61000-4-5, input transient protection (1.0kV).
- Surge protection = 1.0kV.
- 5-year warranty of all electronics and housing.

DIMENSIONS

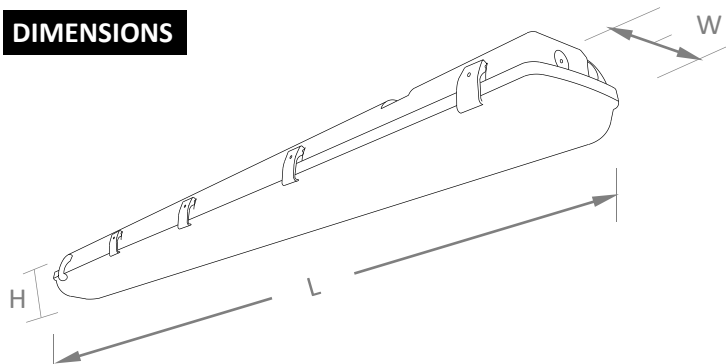

Model	Length (L)	Width (W)	Height (H)
VT-LED-2FT	25.2"	3.35"	4.09"
VT-LED-4FT	48.8"	3.35"	4.09"
VT-LED-8FT	94.5"	3.35"	4.09"

ORDERING INFORMATION

Series	No. of LEDs Highest Output		Color Temperature	Wattage Changeable
VT-LED	2FT-20W	2600 lumens	KFS*	20W
	4FT-40W	5200 lumens		20/30/40W
	8FT-80W	10400 lumens	*Field selectable	40/60/80W

